

51

5,08 RF

Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm



Socket board for direct mating, with mounted pair of flanges F, with solder pins




---

State: Phasing out

---

51

5,08 RF

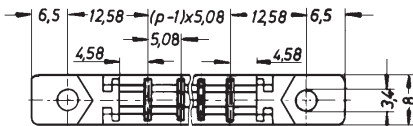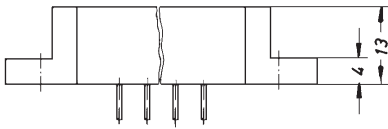

#### Environmental conditions

Temperature range -25 °C/+100 °C

#### Materials

Insulating body PPO  
Contact spring CuSn, pre-nickel and tin-plated  
Flange PC

#### Mechanical data

Mating with Leiterplatte 1,5 ± 0,14 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance ≤ 3 mΩ  
Rated current 5 A  
Rated voltage 250 V AC  
Rated impulse voltage ≥ 3,0 kV

#### Associated products

Accessories  
☞ FF ☞ SP 3

| Designation | Pole Number | PU (Pieces) | MDQ (Pieces) |
|-------------|-------------|-------------|--------------|
| 5,08 RF 03  | 3           | 200         | 5000         |
| 5,08 RF 04  | 4           | 200         | 5000         |
| 5,08 RF 05  | 5           | 200         | 5000         |
| 5,08 RF 06  | 6           | 200         | 5000         |
| 5,08 RF 07  | 7           | 200         | 5000         |
| 5,08 RF 08  | 8           | 200         | 5000         |
| 5,08 RF 09  | 9           | 200         | 5000         |
| 5,08 RF 10  | 10          | 200         | 5000         |
| 5,08 RF 11  | 11          | 200         | 5000         |
| 5,08 RF 12  | 12          | 200         | 5000         |
| 5,08 RF 13  | 13          | 200         | 5000         |
| 5,08 RF 14  | 14          | 200         | 5000         |
| 5,08 RF 15  | 15          | 200         | 5000         |
| 5,08 RF 16  | 16          | 200         | 5000         |
| 5,08 RF 17  | 17          | 200         | 5000         |
| 5,08 RF 18  | 18          | 200         | 5000         |
| 5,08 RF 19  | 19          | 200         | 5000         |
| 5,08 RF 20  | 20          | 200         | 5000         |
| 5,08 RF 21  | 21          | 200         | 5000         |
| 5,08 RF 22  | 22          | 200         | 5000         |
| 5,08 RF 23  | 23          | 200         | 5000         |
| 5,08 RF 24  | 24          | 200         | 5000         |
| 5,08 RF 25  | 25          | 200         | 5000         |
| 5,08 RF 26  | 26          | 200         | 5000         |
| 5,08 RF 27  | 27          | 200         | 5000         |
| 5,08 RF 28  | 28          | 200         | 5000         |
| 5,08 RF 29  | 29          | 200         | 5000         |
| 5,08 RF 30  | 30          | 200         | 5000         |
| 5,08 RF 31  | 31          | 200         | 5000         |

**Packaging:**

in bulk, in a cardboard box