

02 026520





Quicklock circular connectors, IP67



Quicklock socket with locking latch, IP67, size 20, straight version, with plastic housing and solder terminals

02

026520

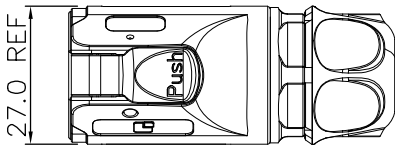

026520 02



026520 03



026520 04




026520 05



026520 07



026520 09



026520 12

Environmental conditions

Temperature range -40 °C/+80 °C

Materials

Insulating body PBT, V-0 according to UL94
 Contact bush CuSn, gold-plated
 Housing PBT, V-0 according to UL94¹
 Locking Zn alloy, chrome-plated
 Cap nut PBT, V-0 according to UL94¹

¹ outdoor sustainable (F1 according to UL 746C)

Mechanical data

Mating cycles 1700
 Insertion force ≤ 90 N
 Withdrawal force ≤ 40 N
 Protection class IP67¹

¹ only in locked condition with an appropriate counterpart

Connectable conductors for solder area

Section 2.5–4.0 mm²/AWG 14–12 (2–4 poles)
 1.0–1.5 mm²/AWG 18–16 (5–7 poles)
 0.34–0.75 mm²/AWG 22–20 (9–12 poles)
 Cable diameter 7.0–13.0 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 5 mΩ
 Rated current 20 A (2–4 poles)
 12 A (5–7 poles)
 5 A (9–12 poles)
 Rated voltage 500 V
 Rated impulse voltage 2500 V AC (2–7 poles)
 1500 V AC (9–12 poles)
 Creepage distance ≥ 2 mm
 Clearance ≥ 2 mm
 Insulation resistance > 500 MΩ

02

026520

Associated products

Counterparts
[024020](#)

02 026520

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
026520 02	2	10	40
026520 03	3	10	40
026520 04	4	10	40
026520 05	5	10	40
026520 07	7	10	40
026520 09	9	10	40
026520 12	12	10	40

Packaging:

in individual plastic bags, in a cardboard box