

03





0307-1

Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP68



Chassis socket acc. to AISG specification and IEC 61076-2-106, IP68, with threaded joint, for printed circuit boards, for back side mounting

03 0307-1

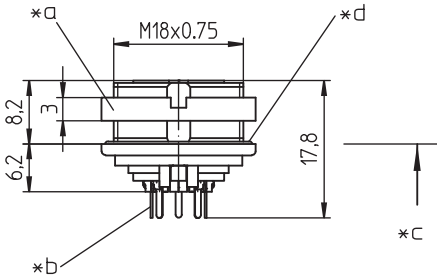

### Environmental conditions

Temperature range -40 °C/+85 °C

### Materials

Insulating body	PA GF, V-0 according to UL94
Contact bush	CuZn, silver-plated and flash gold-plated, tin-plated in solder area
Housing	Zn diecast, pre-copper and nickel-plated
Ring screw	CuZn, nickel-plated
Seal	CR (flat), NBR (O-ring)

### Mechanical data

Insertion force/contact	≤ 5.0 N <sup>1</sup>
Withdrawal force/contact	≥ 1.2 N <sup>1</sup>
Tightening torque connector	1-3 Nm
Tightening torque nut	1-3 Nm
Protection class	IP68 <sup>2</sup>

<sup>1</sup> measured with a polished steel pin, nominal thickness 1.5 mm

<sup>2</sup> according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart; IPX8 requirements under agreement between manufacturer and user

### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance	≤ 5 mΩ
Rated current	5 A (T <sub>amb</sub> 40 °C)
Rated voltage	100 V (with pollution degree 1) 32 V (with pollution degree 2)
Rated impulse voltage	500 V
Material group	II (IEC)/I (UL) (400 ≤ CTI < 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ

### Associated products

Counterparts		
☞ 0331	☞ 0332	☞ 0332-1
☞ 033200	☞ 0365	☞ 036500
☞ Weitere Produkte auf Anfrage	☞ Weitere Produkte auf Anfrage	


Accessories		
☞ 0322 C 16	☞ 0381	☞ 038199
☞ 0384	☞ 0385	☞ 038799

Harnessing equipment  
☞ ZMS 20

03


0307-1

Pin configurations, solder side view




\*h

0307-1 05-3




-



08-a


0307-1 08-1

Printed circuit board layout, solder side view




03-a

0307-1 05-3



-



05-b

0307-1 08-1

- \*a nut enclosed separately
- \*b for bore hole in printed circuit board  $\varnothing 1$  mm
- \*c mounting direction
- \*d O-ring gasket
- \*e flat gasket
- \*f port in mounting plate
- \*g anti-rotation, alternative execution
- \*h pin configuration according to AISG C485

03

0307-1

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0307-1 05-3	5	50	100
0307-1 08-1	8	50	100

**Packaging:**

in a cardboard box