




03 0308-2

Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP68



SWUM™ flange chassis socket acc. to IEC 61076-2-106 and AISG specification, IP68/67, with threaded joint and solder terminals, for front mounting

03 0308-2

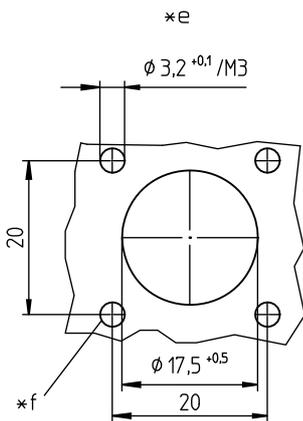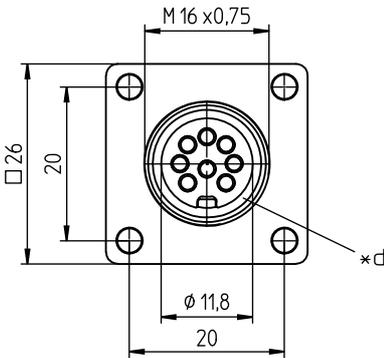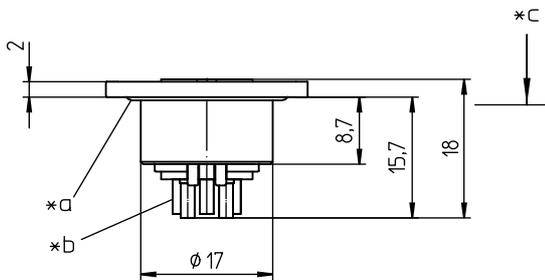

Environmental conditions

Temperature range -40 °C/+85 °C

Materials

Insulating body	PA, V-2 according to UL94
Contact bush	CuZn, silver-plated and flash gold-plated
Housing	Zn diecast, pre-copper and nickel-plated
Seal	CR (flat), EPDM (O-ring)

Mechanical data

Insertion force/contact	≤ 5.0 N ¹
Withdrawal force/contact	≥ 1.2 N ¹
Tightening torque connector	1-3 Nm
Tightening torque nut	1-3 Nm
Protection class	IP68/67 ²

¹ measured with a polished steel pin, nominal thickness 1.5 mm

² according to IEC 60529/DIN EN 60529

IP68: sealed in locked position; pair of appropriate connectors in locked position is sealed against ingress of dust and moisture.

IP67: sealed when unmated (SWUM™); no dust or moisture can ingress into the inside of the device through an unmated connector accidentally left unprotected.
IPX8 requirements under agreement between user and manufacturer

Connectable conductors for solder area

Section ≤ 0.75 mm² (AWG 20)




Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 5 mΩ
Rated current	5 A (T _{amb} 40 °C)
Rated voltage	100 V (with pollution degree 1) 32 V (with pollution degree 2)
Rated impulse voltage	500 V
Material group	II (IEC)/I (UL) (400 ≤ CTI < 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ

03

0308-2

Pin configurations, solder side view



08-a

-

0308-2 06-1

0308-2 08-1

- *a O-ring gasket
- *b cup-shaped solder terminal
- *c mounting direction
- *d flat gasket
- *e port in mounting plate
- *f provide for suitable sealing of screws

Associated products

Counterparts

☞ 0331

☞ 0332

☞ 0332-1

☞ 033200

☞ 0365

☞ 036500

☞ Weitere Produkte auf Anfrage

☞ Weitere Produkte auf Anfrage

Accessories

☞ 0308 C 02

☞ 0322 C 16

☞ 0381

☞ 038199

☞ 038799

03

0308-2

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0308-2 06-1	6	50	100
0308-2 08-1	8	50	100

Packaging:

in a cardboard box