

04 0414 ... S




Circular connectors with bayonet locking M16B, IP40



Chassis plug with bayonet locking and solder terminals,
for front mounting

04

0414 ... S

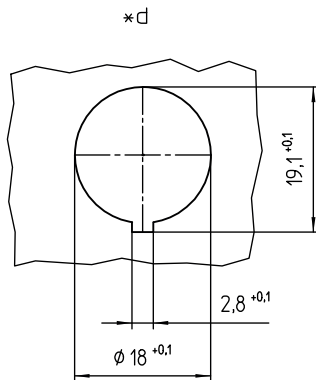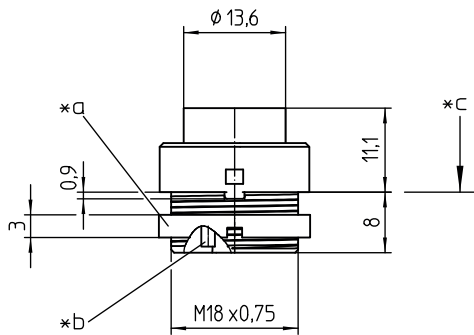

Environmental conditions

Temperature range -40 °C/+85 °C

Materials

Insulating body	PA GF, V-0 according to UL94
Contact pin	CuZn, pre-nickel and silver-plated, passivated
Housing	PA, V-0 according to UL94
Ring screw	CuZn, nickel-plated

Mechanical data

Tightening torque nut	1–2.5 Nm
Thickness of mounting plate	1–4 mm
Protection class	IP40 ¹

¹ according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart

Connectable conductors for solder area

Section ≤ 0.75 mm² (AWG 20)

Electrical data (at T_{amb} 20 °C)

Rated current	5 A (T _{amb} 40 °C)
Rated voltage	with pollution degree 1: 300 V (versions 03, 04, 05-1, 06, 07) 100 V (versions 05, 07-1, 08, 08-1)
Rated impulse voltage	1500 V (versions 03, 04, 05-1, 06, 07) 500 V (versions 05, 07-1, 08, 08-1)
Material group	II (IEC)/I (UL) (400 ≤ CTI < 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ

Associated products

Counterparts
☞ 0421 ... S


Accessories
☞ 0384 ☞ 0385

Harnessing equipment
☞ ZMS 20


04

0414 ... S


Pin configurations, solder side view




03-a
0414 03 S




04-a
0414 04 S




05-a
0414 05-1 S




05-b
0414 05 S




06-a
0414 06 S




07-a
0414 07 S



07-b
0414 07-1 S



08-a
0414 08 S



08-a
0414 08-1 S

- *a nut enclosed separately
- *b cup-shaped solder terminal
- *c mounting direction
- *d port in mounting plate

04

0414 ... S

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0414 03 S	3	50	100
0414 04 S	4	50	100
0414 05 S	5	50	100
0414 05-1 S	5	50	100
0414 06 S	6	50	100
0414 07 S	7	50	100
0414 07-1 S	7	50	100
0414 08 S	8	50	100
0414 08-1 S	8	50	100

Packaging:

preassembled, in a cardboard box