

15

1502 04

## Jack connectors



Jack chassis socket acc. to JIS C 6560 JC35J3A, 3.5 mm, 3 poles/stereo, with threaded joint, with solder eyes, for front mounting




---

State: Active

---

15

1502 04

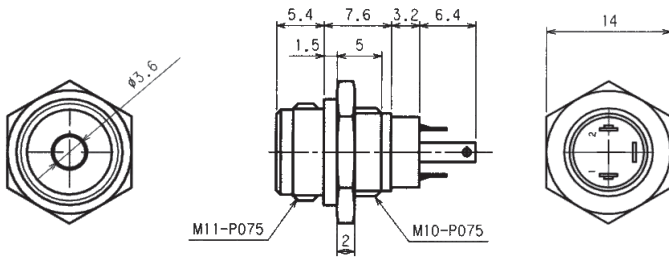

#### Environmental conditions

Temperature range -20 °C/+70 °C

#### Materials

Insulating body PBT GF, V-0 according to UL94  
Contact spring Cu alloy, nickel-plated/gold-plated

#### Mechanical data

Mating cycles  $\geq 5000$   
Insertion force 4–20 N  
Withdrawal force 2–15 N

#### Electrical data (at $T_{amb}$ 20 °C)

Contact resistance  $\leq 50$  m $\Omega$   
Rated current 1 A  
Rated voltage 34 V AC/DC  
Rated impulse voltage 500 V/60 s  
Insulation resistance  $\geq 100$  M $\Omega$

#### Associated products

Counterparts  
☞ 1532 05

15

1502 04

| Designation | Pole Number | PU (Pieces) | MDQ (Pieces) |
|-------------|-------------|-------------|--------------|
| 1502 04     | 3           | 100         | 200          |

**Packaging:**

in bulk, in a cardboard box or a plastic bag