

16

1614 14

Power supply connectors





Power supply chassis socket, straight version, with break contact and solder eyes, for back side mounting

State: Obsolete

16

1614 14

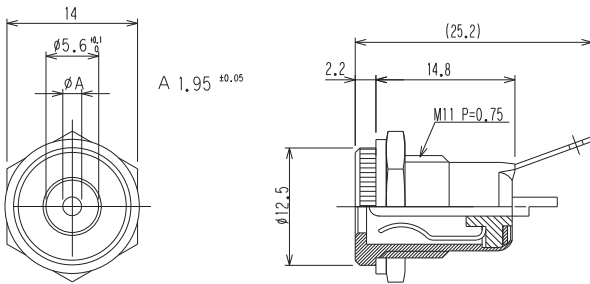

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	ABS, V-0 according to UL94
Contact	Cu alloy, nickel-plated/silver-plated
Insulation	PF
Hexagonal nut	CuZn, nickel-plated
Washer	steel, nickel-plated

Mechanical data







Diameter opening	5.7 mm
Diameter center pin	2.0 mm
Mating cycles	≥ 5000
Insertion force	≤ 30 N ¹
Withdrawal force	3–30 N ¹

¹ measured with a gauge plug

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 30 mΩ
Rated current	0.5 A
Rated voltage	12 V DC
Rated impulse voltage	250 V/60 s
Insulation resistance	≥ 50 MΩ

Associated products

Counterparts			
 1633 02	 1633 03	 NES/J 21	
 NES/J 21 W	 NES/J 210	 XNES/J 210	

16

1614 14

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1614 14	2	250	500

Packaging:

in bulk, in a cardboard box or a plastic bag