

16

1636 03

Power supply connectors



Power supply plug acc. to JEITA RC-5320A JSAP3, straight version, with solder eyes and bend protection


---

State: Active

---

16

1636 03

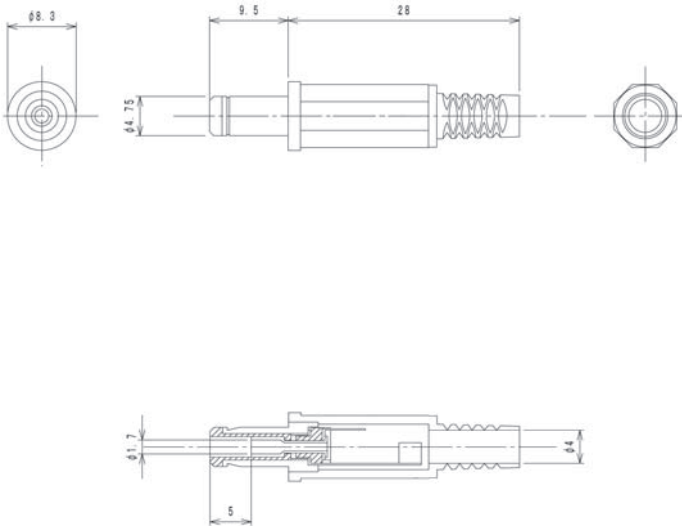

#### Environmental conditions

Temperature range -20 °C/+70 °C

#### Materials

Insulating body	PC
Contact	CuZn, nickel-plated
Insulation	POM
Housing	PP

#### Mechanical data

Outer diameter	4,75 mm
Inner diameter	1,7 mm

#### Connectable conductors for solder area

Cable diameter	4 mm
----------------	------

#### Electrical data (at T<sub>amb</sub> 20 °C)

Rated current	2 A
Rated voltage	10,5 V DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

#### Associated products

Counterparts  
[☞ 1613 07](#)

16

1636 03

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1636 03	2	100	500

**Packaging:**

in bulk, in a cardboard box or a plastic bag