

24

2482

USB and IEEE 1394 connectors



USB 2.0 connecting cable, type A plug 4 pole to micro  
type B plug 5 poles



---

State: Obsolete

---

24

2482

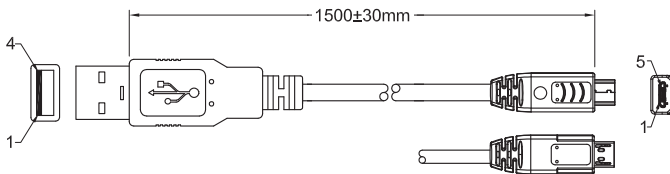

#### Materials

Contact spring	Cu alloy, gold-plated
Housing	nickel-plated
Overmolding/handle	PVC
Cable	PVC

#### Connected cable

Construction	UL2835 28 AWG/30 AWG, 2C + 1 TP, SR-PVC/HD-PE, braid, PVC jacket
--------------	--

#### Electrical data (at T<sub>amb</sub> 20 °C)

Rated current	0,5 A
Rated voltage	5 V AC

#### Associated products

##### Counterparts

<a href="#">☞ 1673 01</a>	<a href="#">☞ 2410 05</a>	<a href="#">☞ 2410 09</a>
<a href="#">☞ 2410 11</a>	<a href="#">☞ 2410 12</a>	<a href="#">☞ 2410 13</a>
<a href="#">☞ 2410 14</a>	<a href="#">☞ 2420 01</a>	<a href="#">☞ 2483 01</a>
<a href="#">☞ 2486 01</a>	<a href="#">☞ 2486 03</a>	<a href="#">☞ 2486 04</a>
<a href="#">☞ 4512</a>		

24

2482

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
2482 02 01500	4/5	300	300	1500

**Packaging:**

in bulk, in a cardboard box or a plastic bag