
35 835106


RAST 2.5 connectors, pitch 2.5/5.0 mm



Smplcty™ device connector, based on RAST 2.5, 7 pole, for direct mating, with cable, overmolded, with IP54 sealing to the housing
contact pitch 2.5 mm

35 835106

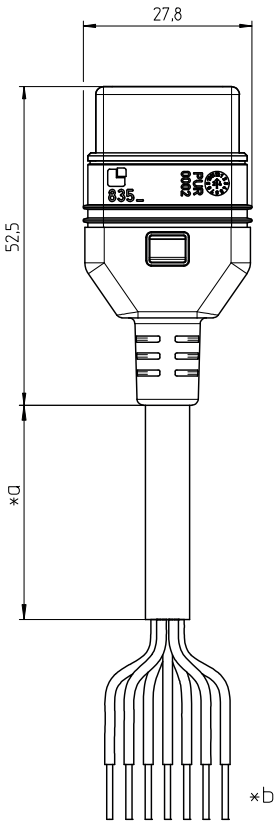

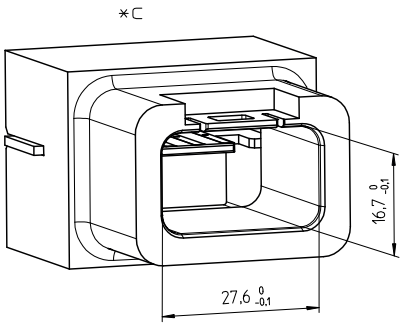

*a length according to customer request

*b line end configuration according to customer request

*c example for a mating port design (on the customer side), for direct mating with the printed circuit board

Environmental conditions

Temperature range	-40 °C/+80 °C [1]

[1] upper limit temperature

Materials

Insulating body	PA, V-0 according to UL94 [1]
Contact spring	CuSn, tin-plated
Overmolding/handle	TPU [2]
Further data	Connected cable: PUR, halogen-free, black, 7 x 0.35 mm² (AWG 22), 909498

[1] material halogen-free, component glow wire resistant (GWT 750 °C), testing acc. to IEC 60695-2-11, assessment acc. to IEC 60335-1 (flame < 2 s)

[2] component glow wire resistant (GWT 750 °C), testing acc. to IEC 60695-2-11, assessment acc. to IEC 60335-1 (flame < 2 s)

Mechanical data

Mating with	printed circuit board 1.5 ± 0.14 mm
Insertion force	65 N [1]
Withdrawal force	35 N [1]
Protection class	IP54

[1] measured with a couterpart, including printed circuit board with recommended geometry

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 5 mΩ
Rated current	5 A (T_{amb} 25 °C) 3 A (T_{amb} 60 °C)
Rated voltage	50 V
Insulation resistance	> 1 GΩ

35 835106

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
835106	4		