

51

FL

Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm




Flange, pair, for mounting in right angle to mating direction, attachable with loss of one contact spring each

State: Phasing out

51

FL

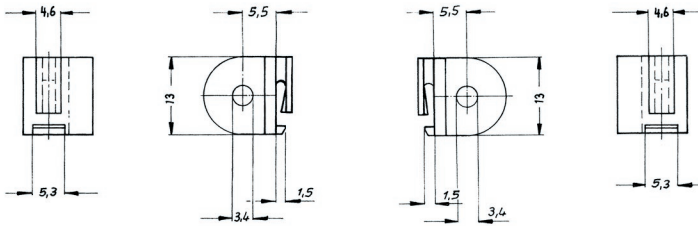


Environmental conditions

Temperature range -25 °C/+100 °C

Materials

Flange PC

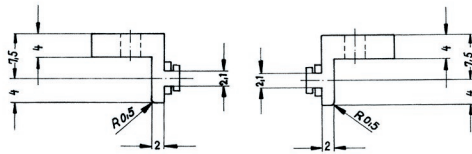

Associated products

Accessories

☞ 2,5 R	☞ 2,5 R	☞ 2,5 U
☞ 2,5 U	☞ 2,54 R	☞ 2,54 R
☞ 2,54 U	☞ 2,54 U	☞ 5 R
☞ 5 R	☞ 5 U	☞ 5 U
☞ 5,08 R	☞ 5,08 R	☞ 5,08 U
☞ 5,08 U	☞ 8510 A 02	☞ 8510 A 02
☞ 8514 A 01	☞ 8514 A 01	☞ 8514 A 02
☞ 8514 A 02	☞ 8514 A 03	☞ 8514 A 03

51

FL

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
FL	-	100	2000

Packaging:

in bulk, in a cardboard box