



97 HA30e-R

Tools and harnessing machines

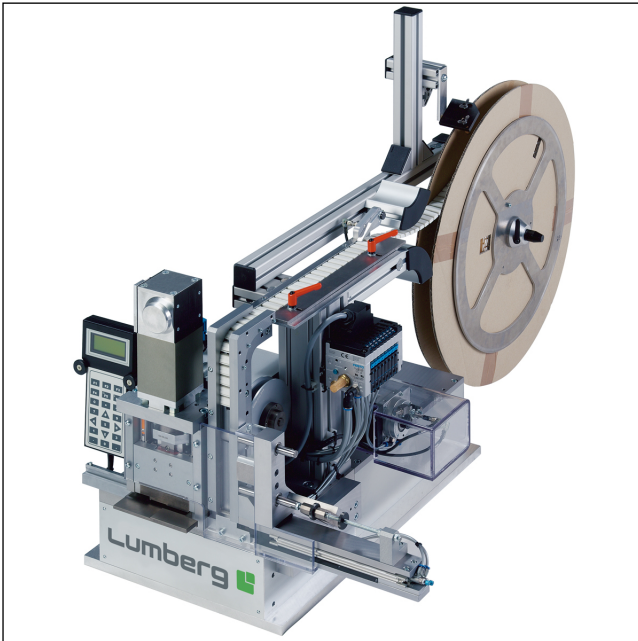

Semiautomatic harnessing machine for termination of Micromodul™ connectors in insulation displacement technology

Approvals: 

Range of application

Connector	MICA VP3
Pole number	4–26
Pitch	1,27 mm
State of delivery of connectors	on reel, versions A and C
Processable conductor	flat cable 1.27 mm

Features

Application	middle and high volume production
Stroke capacity	ca. 900 connectors/h
Scope of functions and delivery	- Automatic feeding of connectors from reel - Automatic release of press action by control of line end position - Harnessing of bus cables not possible
Options	- Cable color detection 7 + 1

Dimensions and supply data

Dimensions (H x W x D)	500 mm x 600 mm x 700 mm
Weight	ca. 45 kg
Electrical supply	230 V/50 Hz
Compressed air supply	6 bar
Compressed air consumption	1 m ³ /1000 Steckverbinder

97

HA30e-R

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
HA30e-R	-		