



97 HA67

Tools and harnessing machines

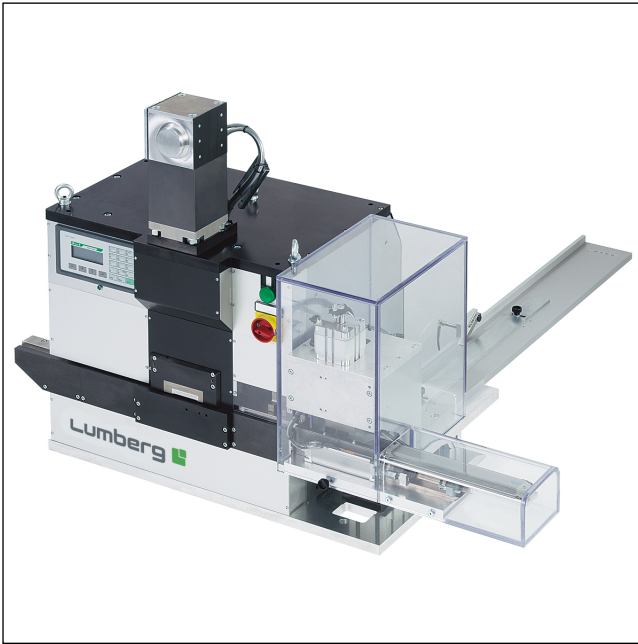

Semiautomatic harnessing machine for termination of pluggable terminal blocks in insulation displacement technology

---

Approvals: 

---

97

HA67

---

**Range of application**

Connector	6770
Pole number	2-7
Pitch	5,08 mm
State of delivery of connectors	in chain
Processable conductor	discrete conductor, notched flat cable* 5,08 mm

---

**Features**

Application	middle and high volume production
Stroke capacity	ca. 1000/h
Scope of functions and delivery	- Automatic feeding of connectors - Verification of insertion pattern and line end position during manual insertion of conductors - Fixation of inserted discrete conductors by spring-loaded pressure pads until pressing - Automatic release of press action by control of line end position
Options	- Cable color detection 7 + 1 - Pneumatic cable clamping - Cable bending station

---

**Dimensions and supply data**

Dimensions (H x W x D)	750 mm x 1080 mm x 1100 mm
Weight	ca. 140 kg
Electrical supply	230 V/50 Hz
Compressed air supply	6 bar
Compressed air consumption	1 m <sup>3</sup> /1000 Steckverbinder

---

97

HA67

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
HA67	-		1