




Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP68




Chassis socket acc. to IEC 61076-2-106, IP40, with threaded joint, empty housing for reception of crimp contacts, for front mounting




KFV ... C 03









Environmental conditions

Temperature range	-40 °C/+85 °C
Materials	
Insulating body	PA GF, V-0 according to UL94
Housing	Zn diecast, pre-copper and nickel- plated
Ring screw	CuZn, nickel-plated
Mechanical data	

Tightening torgue connector

Tightening torque connector	1-3 Nm
Tightening torque nut	1-3 Nm
Protection class	IP401
1	

¹ according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart

Electrical data (at Tamb 20 °C)

Contact resistance	≤ 5 mΩ
Rated current	5 A
Rated voltage	with pollution degree 1: 300 V (versions 30, 40, 50/6, 60, 70) 100 V (versions 50, 71, 81) with pollution degree 2: 250 V (versions 30, 40) 32 V (versions 50, 71, 81) 160 V (versions 50/6, 60, 70)
Rated impulse voltage	1500 V (versions 30, 40, 50/6, 60, 70) 500 V (versions 50, 71, 81)
Material group	II (IEC)/1 (UL) (400 ≤ CTI < 600)
Overvoltage category	I
Insulation resistance	> 100 MΩ

Associated products


Counterparts & SV & WSV	ເ₽ SV C ເ₽ WSV C	⊡ " SV8
Accessories	ය 0381	년 038199
	ය 0384	년 0385

Harnessing equipment 🗗 ZMS 20

2 of 4





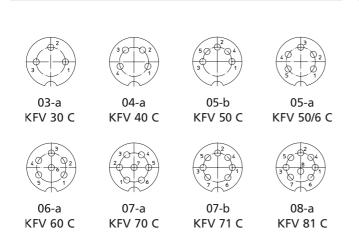

- *a nut enclosed separately
- *b mounting direction
- *c port in mounting plate





Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
KFV 30 C	3	50	100
KFV 40 C	4	50	100
KFV 50 C	5	50	100
KFV 50/6 C	5	50	100
KFV 60 C	6	50	100
KFV 70 C	7	50	100
KFV 71 C	7	50	100
KFV 81 C	8	50	100

Packaging:

in a cardboard box