

15

KLS 1


Jack connectors



Jack plug acc. to JIS C 6560 JC25P2, 2.5 mm, 2 poles/
mono, straight version, ball headed, with bend protection
and solder terminals

15

KLS 1

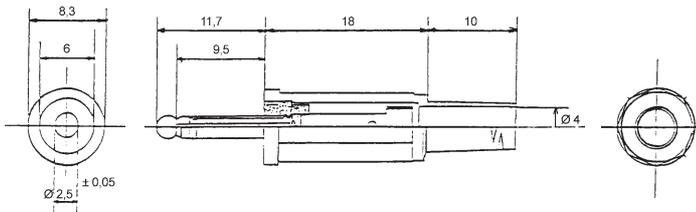

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Contact	Cu alloy/steel, nickel-plated
Insulation	ABS
Housing	PP

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Rated current	0,5 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts
[1501 09](#) [KLB 1](#)

15

KLS 1

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
KLS 1	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag