

16

NES/J 25


Power supply connectors



Power supply plug, short, straight version, with solder eyes

16

NES/J 25

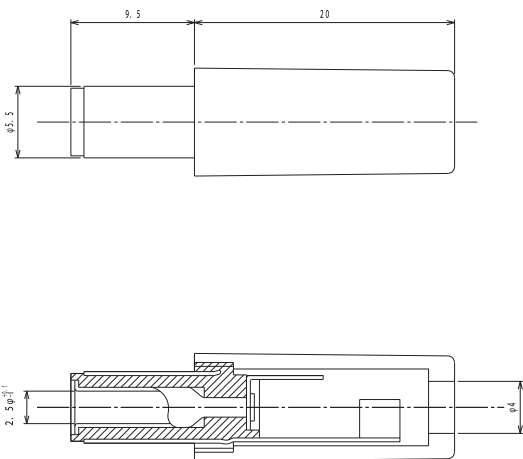

#### Environmental conditions

Temperature range -25 °C/+70 °C

#### Materials

Insulating body ABS, HB according to UL94  
 Contact CuZn, nickel-plated  
 Housing ABS

#### Mechanical data

Outer diameter 5.5 mm  
 Inner diameter 2.5 mm

#### Connectable conductors for solder area

Cable diameter 4 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance ≤ 30 mΩ  
 Rated current 1 A  
 Rated voltage 12 V DC  
 Rated impulse voltage 500 V/60 s  
 Insulation resistance ≥ 100 MΩ

#### Associated products

Counterparts  
 ↗ 1610 05      ↗ 1610 07      ↗ 1613 21  
 ↗ 1613 33      ↗ 1614 10      ↗ 1614 15  
 ↗ 1614 20      ↗ 1614 24      ↗ NEB/J 25  
 ↗ NEB/J 25 C      ↗ NEK/J 250

16

NES/J 25

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
NES/J 25	2	100	1000

**Packaging:**

in bulk, in a cardboard box or a plastic bag