

16

NES/J 250

Power supply connectors





Power supply plug, long, straight version, with solder eyes

State: Active

16

NES/J 250

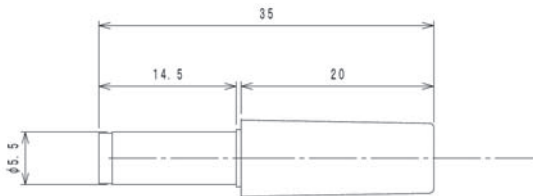

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	PC
Contact	CuZn, nickel-plated
Insulation	ABS/PVC
Housing	ABS

Mechanical data

Outer diameter	5,5 mm
Inner diameter	2,5 mm

Connectable conductors for solder area












Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Rated current	1 A
Rated voltage	12 V DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 M Ω

Associated products

Counterparts

 1610 01	 1610 05	 1613 21
 1614 10	 1614 15	 1614 20
 1634 02	 NEB/J 25	 NEB/J 25 C
 NEB/J 25 R	 NEK/J 250	

16

NES/J 250

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
NES/J 250	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag