


51

SP 3

Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm


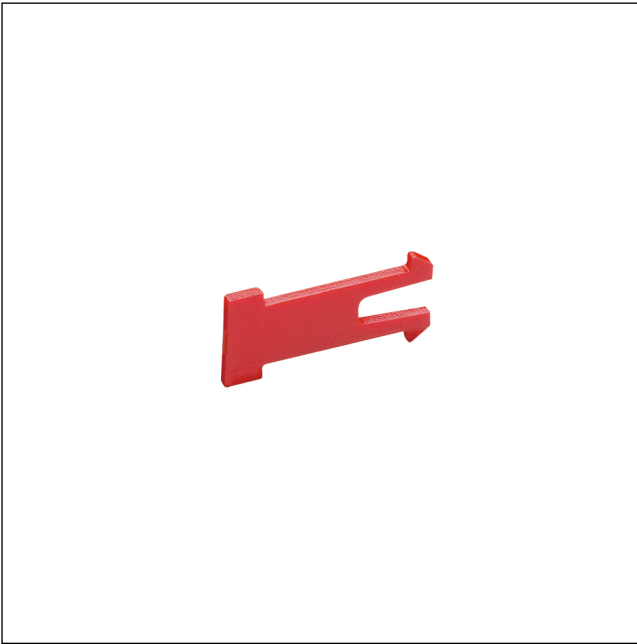


Keying insert for socket boards 2,5..., 2,54..., 3,96..., 5,08,  
insertable instead of a contact spring

---

State: Phasing out

---



**Environmental conditions**

Temperature range -25 °C/+100 °C

**Materials**

Component POM

**Associated products**

Accessories

☞ 2,5 R	☞ 2,5 R	☞ 2,5 RF
☞ 2,5 RF	☞ 2,5 RFL	☞ 2,5 RFL
☞ 2,5 U	☞ 2,5 U	☞ 2,5 UF
☞ 2,5 UF	☞ 2,5 UFL	☞ 2,5 UFL
☞ 2,54 R	☞ 2,54 R	☞ 2,54 RF
☞ 2,54 RF	☞ 2,54 RFL	☞ 2,54 RFL
☞ 2,54 U	☞ 2,54 U	☞ 2,54 UF
☞ 2,54 UF	☞ 2,54 UFL	☞ 2,54 UFL
☞ 5,08 R	☞ 5,08 R	☞ 5,08 RF
☞ 5,08 RF	☞ 5,08 RFL	☞ 5,08 RFL
☞ 5,08 U	☞ 5,08 U	☞ 5,08 UF
☞ 5,08 UF	☞ 5,08 UFL	☞ 5,08 UFL

51

SP 3

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
SP 3	-	100	5000

**Packaging:**

in bulk, in a plastic bag, in a cardboard box